

PSAM24V2.7A and PSAM48V1.3A

FEATURES


- Low Cost, High Reliability
- High Efficiency, Low Working Temperature
- Built in EMI Filter, Low Ripple Noise
- 100% Full Load Burn-In Test
- Short Circuit/Over Voltage/Overload Protection
- Compact Size, Light Weight



DESCRIPTION

The PSAM24V2.7A and PSAM48V1.3A power supplies have a single voltage output with power capabilities up to 65 watts. With an adjustable output, these power supplies are efficient to run Anaheim Automation's lines of low current microsteppers and programmable controllers. With a compact size of 5.75" x 3.25" x 1.75" and dual mounting position "L Bracket", the PSAM24V2.7A, PSAM48V1.3A can be mounted just about anywhere.

DIMENSIONS/SPECIFICATIONS

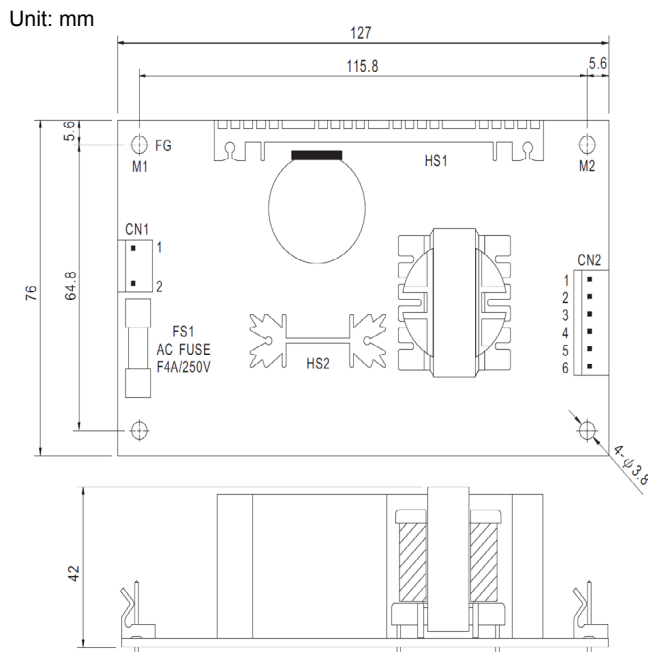

	PSAM24V2.7A	PSAM48V1.3A
DC Voltage Output	24V	48V
Output Voltage Tolerance	±2%	±2%
Output Rated Current	2.7A	1.35A
Ripple & Noise	100mVp-p	
Load Regulation	±2%	
Rated Output Power	65W	
Efficiency	80%	
Input Voltage Range	90-264VAC, 47-440Hz	
AC Current	1.2A/115VAC, 0.7A/230VAC	
AC Inrush Current	Cold Start 20A/115VAC, 40A/230VAC	
Leakage Current	<0.75 mA/240VAC	

Included Cables:	
Part#	Description
CBL-AA4366	3 Pin Connector for use with Power Supplies
CBL-AA4367	6 Pin Connector for use with Power Supplies

L010178